

WAC LIGHTING

Loophole

Bathroom Vanity & Sconce

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-61326 26"	2700K	BK Black	24W	1475	946
	3000K		24W	1475	981
	3500K		24W	1475	958

Example: **WS-61326-35-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION


A twist of illumination. Elegant contours offering gracefully bending light.

FEATURES

- Omnidirectional illumination
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Color Temp:	3500K,3000K,2700K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-5% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL Damp Location Listed
Construction:	Metal body with silicone diffuser

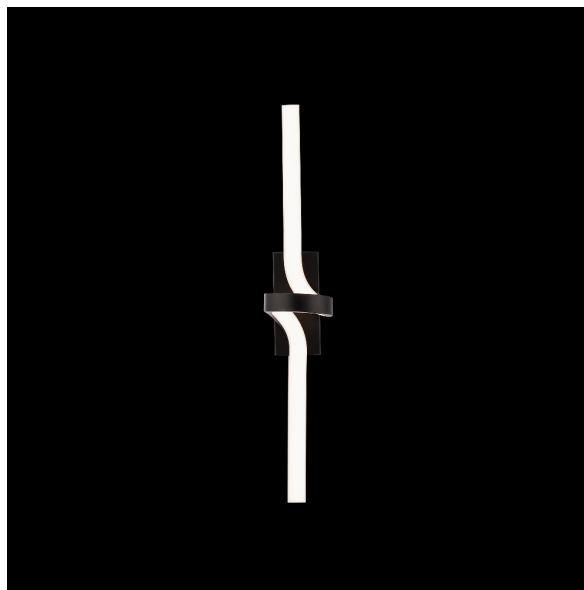


FINISHES:



Black

LINE DRAWING:

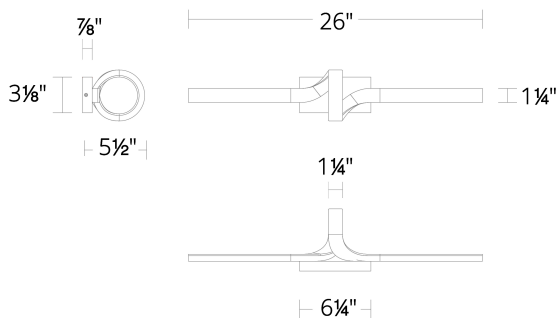

WS-61326

WAC LIGHTING

Loophole

Bathroom Vanity & Sconce

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-61334 34"	2700K	BK Black	29W	1805	1157
	3000K		29W	1805	1211
	3500K		29W	1805	1179

Example: **WS-61334-35-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

A twist of illumination. Elegant contours offering gracefully bending light.

FEATURES

- Omnidirectional illumination
- Conversion plate included to accommodate 4" junction box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Option to pre-select color temperature or adjust in the field
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Color Temp:	3500K,3000K,2700K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-5%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL Damp Location Listed
Construction:	Metal body with silicone diffuser




FINISHES:



Black

LINE DRAWING:

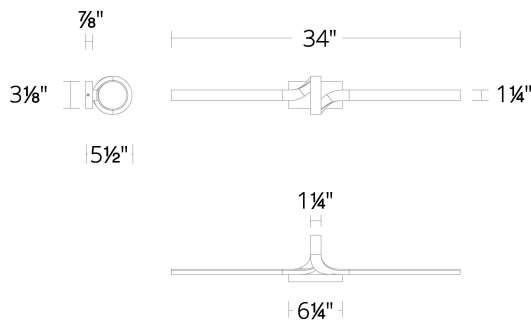

WS-61334